

**TECHNICAL DATA SHEET**




**MATERIAL**

DMX uses a specially formulated Polypropylene that provides a high environmental stress crack resistance to alkalines and acids found in the soil. In addition, DMX is made from 100% virgin resin. Our special extrusion process utilizes low heat and low shear to prevent heat degradation in the final product. The use of antioxidants and lubricants further ensure a smooth, superior quality membrane that outperforms the competition.

**PROPERTIES**

The DMX Drain 18X™ drainage board finished product has a 10mm dimple height, providing a drainage capacity of 18 gal/min/ft of width and a compressive strength of 18,000lbs/sq ft. Polypropylene is highly resistant to chemical interaction and has a life expectancy of up to 50 years when properly installed in accordance with the manufacturer's instructions

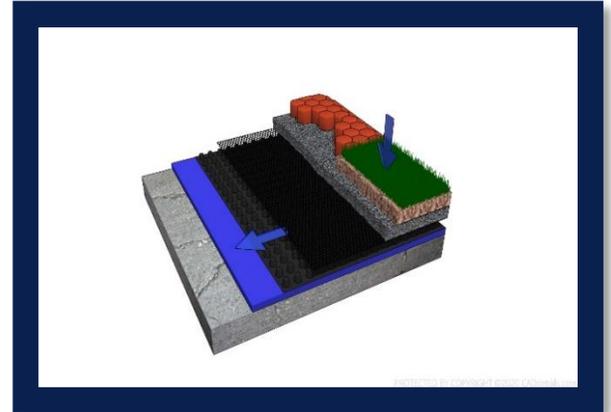

**TECHNICAL DATA**

DRAINAGE CORE	TEST METHOD	IMPERIAL	METRIC
Colour	Black		
Dimensions (W x L)		4 x 50ft, 6 x 50ft	1.22 x 15.25m, 1.83 x 15.25m
Compressive Strength	ASTM D 1621	18,000 psf (125 psi)	862 kNm <sup>2</sup>
Thickness	ASTM D 1777	7/16 inch	10 mm
Material	Polypropylene		
FILTER FABRIC		WOVEN	
Grab Tensile	ASTM D 4632	365 x 200 lbs	1.62 x 0.89 kN
Grab Elongation	ASTM D 4632	15%	15%
Trapezoidal Tear	ASTM D 4533	115 x 75 lbs	0.51 x 0.33 kN
CBR Puncture Resistance	ASTM D 6241	675 lbs	3.0 kN
Water Flow	ASTM D 4491	145 gpm/sf	5907 l/min/sm
Permittivity	ASTM D 4491	2.1 Sec <sup>-1</sup>	2.1 Sec <sup>-1</sup>
AOS	ASTM D 4751	40 US Sieve	0.425 mm
UV Resistance	ASTM D 4355	90/500 %/hrs	90/500 %/hrs
COMPOSITE SYSTEM			
Water Flow Rate (V)	ASTM D 4716	20 Gal/min/ft	248 L/min/m
Roll Size		4ft x 50ft, 6ft x 50ft	1.22m x 15.25m, 1.83m x 15.25m
Roll Weight		46 lbs, 70 lbs	21 kg, 32 kg